



MODIFICATION						NAME	40 LEAD SIDE BRAZED PACKAGE				TOLERANCE	SB040SA95-1				S=0	D=0
						SCALE	4 / 1				UNLESS OTHERWISE SPECIFIED	DRAWN				DATE	
						MATERIAL	AS INDICATED				±.005	CHECKED				DEC.01,'86	
						THIRD ANGLE PROJECTION	KYOCERA CORPORATION KYOTO JAPAN					APPROVED					
	CHANGED		DATE	DRAWN	CHECKED	APPROVED	DRAWING NO.				KD-S86A95				SHEET	1 / 2	

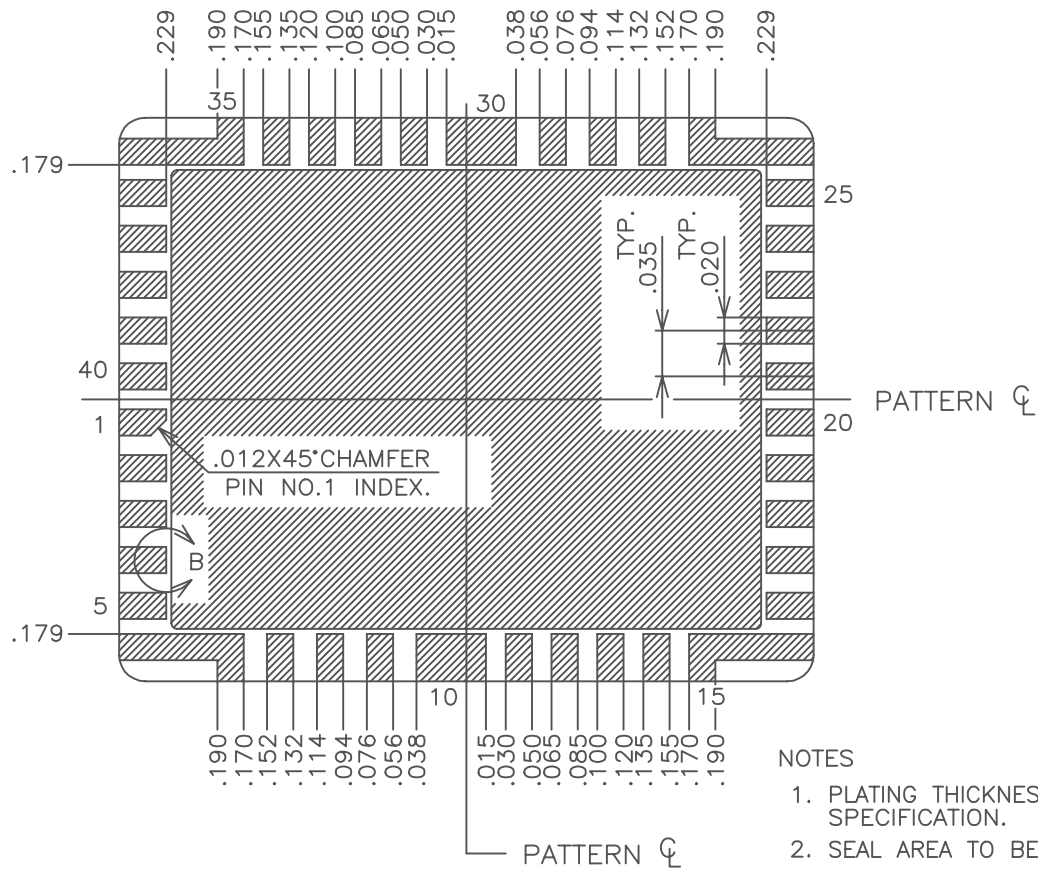

DETAIL-B

NOTES

1. PLATING THICKNESS TO BE PER CUSTOMER'S SPECIFICATION.
2. SEAL AREA TO BE METALLIZED.
3. DIE ATTACH AREA TO BE METALLIZED.
4. SEAL RING AND DIE ATTACH PAD TO BE FLOATING FROM ANY PINS.
5. LEAD RESISTANCE : 0.5 OHMS MAX.

MODIFICATION						NAME	TOLERANCE	DRAWN	CHECKED	APPROVED	DATE
						40 LEAD SIDE BRAZED PACKAGE	UNLESS OTHERWISE SPECIFIED	M.K	K.O	K.M	DEC.01.'86
						SCALE 10 / 1	MATERIAL				
							THIRD ANGLE PROJECTION				
	CHANGED	DATE	DRAWN	CHECKED	APPROVED	 KYOCERA CORPORATION KYOTO JAPAN	DRAWING NO.			SHEET	
							KD-S86A95			2 / 2	