


 SECTION A-A

NOTES: 1. PLATING: NICKEL (80μ INCHES MIN) + GOLD (60μ INCHES MIN).
 2. NO LEAD SHALL BE ELECTRICALLY CONNECTED TO THE DIE ATTACH PAD. (SEAL RING ISOLATED).

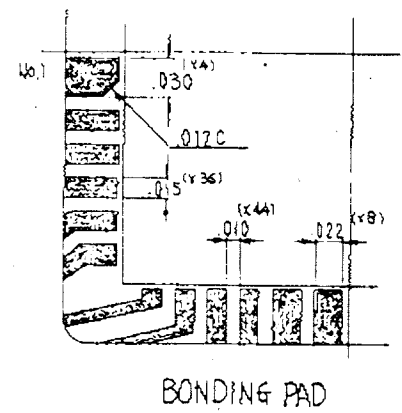

| | | |
|--|----------------------------|---|
| UNLESS OTHERWISE SPECIFIED TOLERANCES | DRAWN SEP-21-82 H-KAWAI | NGK SPARK PLUG CO., LTD NAGOYA, JAPAN. |
| ±1% N.L.T ±.005 | CHECKED J. Washiro | NTK TECHNICAL CERAMIC DIVISION |
| MATERIAL CERAMIC: 91% BLACK ALUMINA LEAD: ALLOY 42 | APPROVED C. G. Gai | TITLE 48 LEAD SIDE BRAZE PACKAGE |
| | UNIT: INCH SCALE: | DWG. NO. IDK48F1-459AAL |
| | | ISSUE |

| NO. | DESCRIPTION | DATE | DRAWN |
|-----------|-------------|------|-------|
| REVISIONS | | | |