SSM P/N CCJ04419

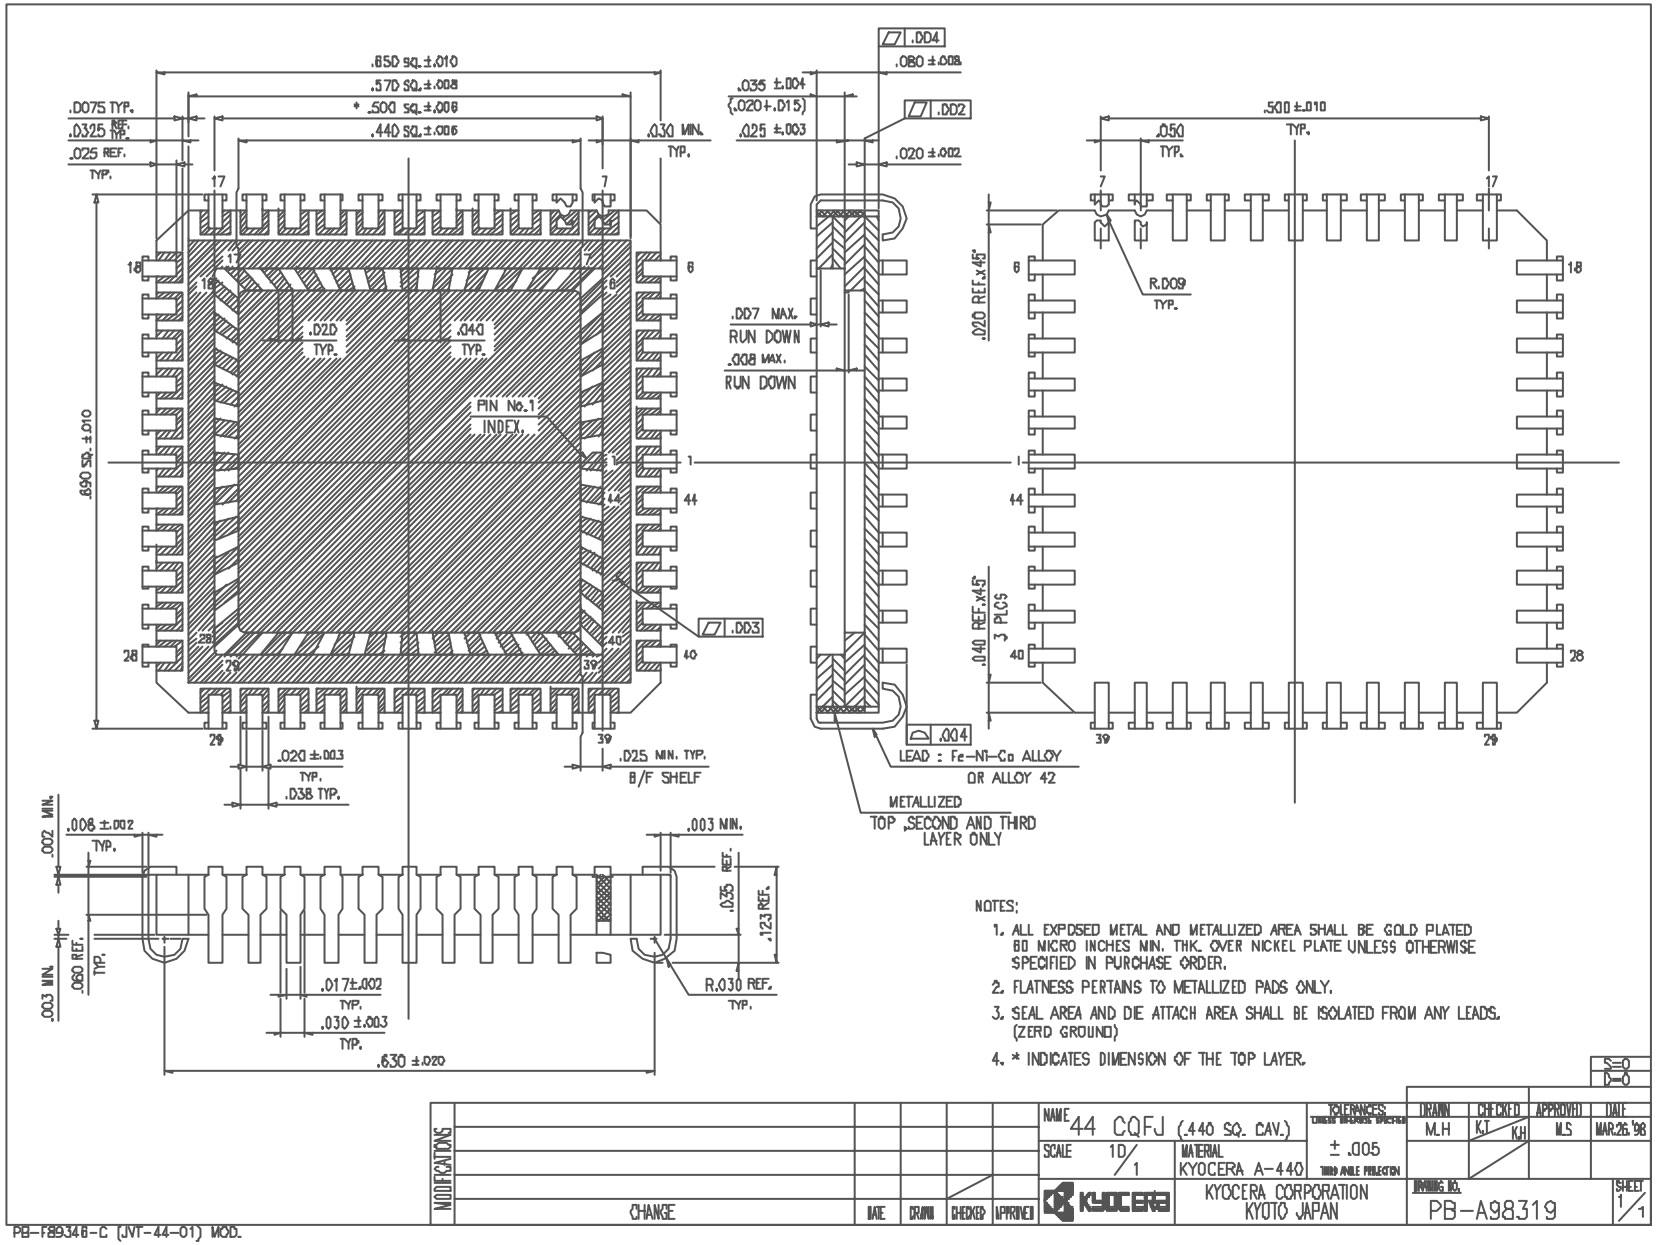

NOTES:

1. ALL EXPOSED METAL AND METALLIZED AREA SHALL BE GOLD PLATED 60 MICRO INCHES MIN. THK. OVER NICKEL PLATE UNLESS OTHERWISE SPECIFIED IN PURCHASE ORDER.
2. FLATNESS PERTAINS TO METALLIZED PADS ONLY.
3. SEAL AREA AND DIE ATTACH AREA SHALL BE ISOLATED FROM ANY LEADS. (ZERO GROUND)
4. * INDICATES DIMENSION OF THE TOP LAYER.

MODIFICATIONS								
	CHANGE	DATE	DRAWN	CHECKED	APPROVED	NAME 44 CQFJ (.440 SQ. CAV.)	TOLERANCES: ± .005	DRAWN M.H / CHECKED K.T KH / APPROVED M.S / DATE MAR.26.'98
						SCALE 10/1	MATERIAL KYOCERA A-440	
						KYOCERA	KYOCERA CORPORATION KYOTO JAPAN	DRAWING NO. PB-A98319 / SHEET 1/1

PB-F89346-C (JVT-44-01) MOD.