


REVISIONS					
REV.	SYM.	DATE	REVISION RECORD	CHK BY	CR.
A	-	8-28-88	ADD FULL FRAME DIMS, FORM DIMS.	MPL	
B	a	9-2-88	CHANGE TO .010 WIDE PAD LEADS	MPL	
C	b	9-2-88	CHANGE .184 STRAIGHT-OUT CENTER LEADS	MPL	
D	c	9-15-88	ADD CAVITY OPTIONS 1, 2, 3	MPL	
E	-	12-8-88	RELOCATE PROGRESSION DIMENSION LINE	MPL	
F	d	12-8-88	ADD CAVITY OPTION 4	MPL	
G	e	1-7-89	.172 ± .008 CAVITY OPT DELETED, ADD TOL.	TRUC	M
H	f	1-17-89	ADD 314 TO FORM OPTIM/ADD METRIC DIM	TRUC	M

TOP FORM	
OPT.	WIDTH
1	311 (7.90)
2	314 (7.98)

FORM WIDTH	
OPT.	WIDTH
1	365 (9.27)
2	350 (8.84)
3	300 (7.62)

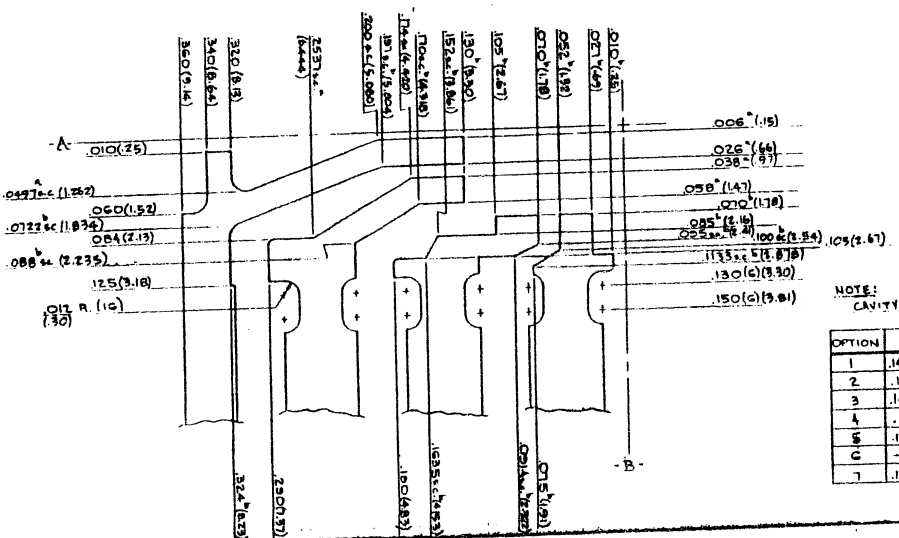

METRIC DIM'S IN PARENTHESES

NOTE: CAVITY TOLERANCE ±.005 (0.13) / QUADRANT

OPTION	SIZE
1	.140 x .260
2	.160 x .260
3	.160 x .270
4	.170 x .260
5	.170 x .265
6	.170 x .270
7	.150 x .210

CDF01620

DO NOT SCALE DIMS.	ADVALLOY, INCORP 601 S CHARLEST PALO ALTO, CALIF
TOLERANCES UNLESS OTHERWISE SPECIFIED	FRAC DEC DECIMALS INCHES
DRYING 1.5 HOURS AT 100°C	DATE ORDERED
QUALITY DATE	10189
ATTACHED DATE	
DATE ORDERED	