




NOTES: 1. NTK SPEC YS-1004 SHALL APPLY.

2. GLASS MOISTURE = 5000PPM

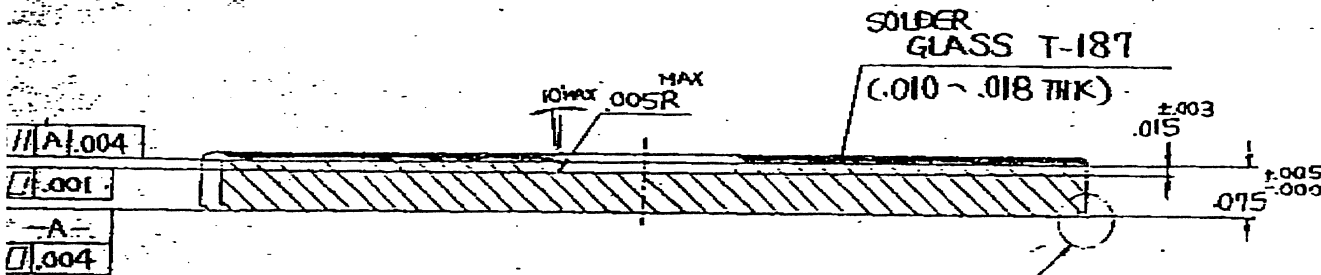

DESIGNER TOLERANCES	AUG-28-84 <i>Y. Kachi</i>	NGK SPARK PLUG CO., LTD NAGOYA JAPAN NTK TECHNICAL CERAMIC DIVISION
MATERIAL BLACK ALUMINA	<i>Y. Kachi</i> <i>H. Gal</i>	TITLE 24 LEAD MSI SKINNY CERDIP BA
	UNIT INCH SCALE 5/1	DWG. NO. A24-295-109-11ML