


SSM P/N CPG10030

NTK

TECHNICAL CERAMICS

LATEST REVISION'S DESCRIPTION
 CHG. DWG. NO. IPKXDF1-8631B WAS -8631AA
 CHG. INDEX MARK MATERIAL INDEX PASTE WAS METALLIZE

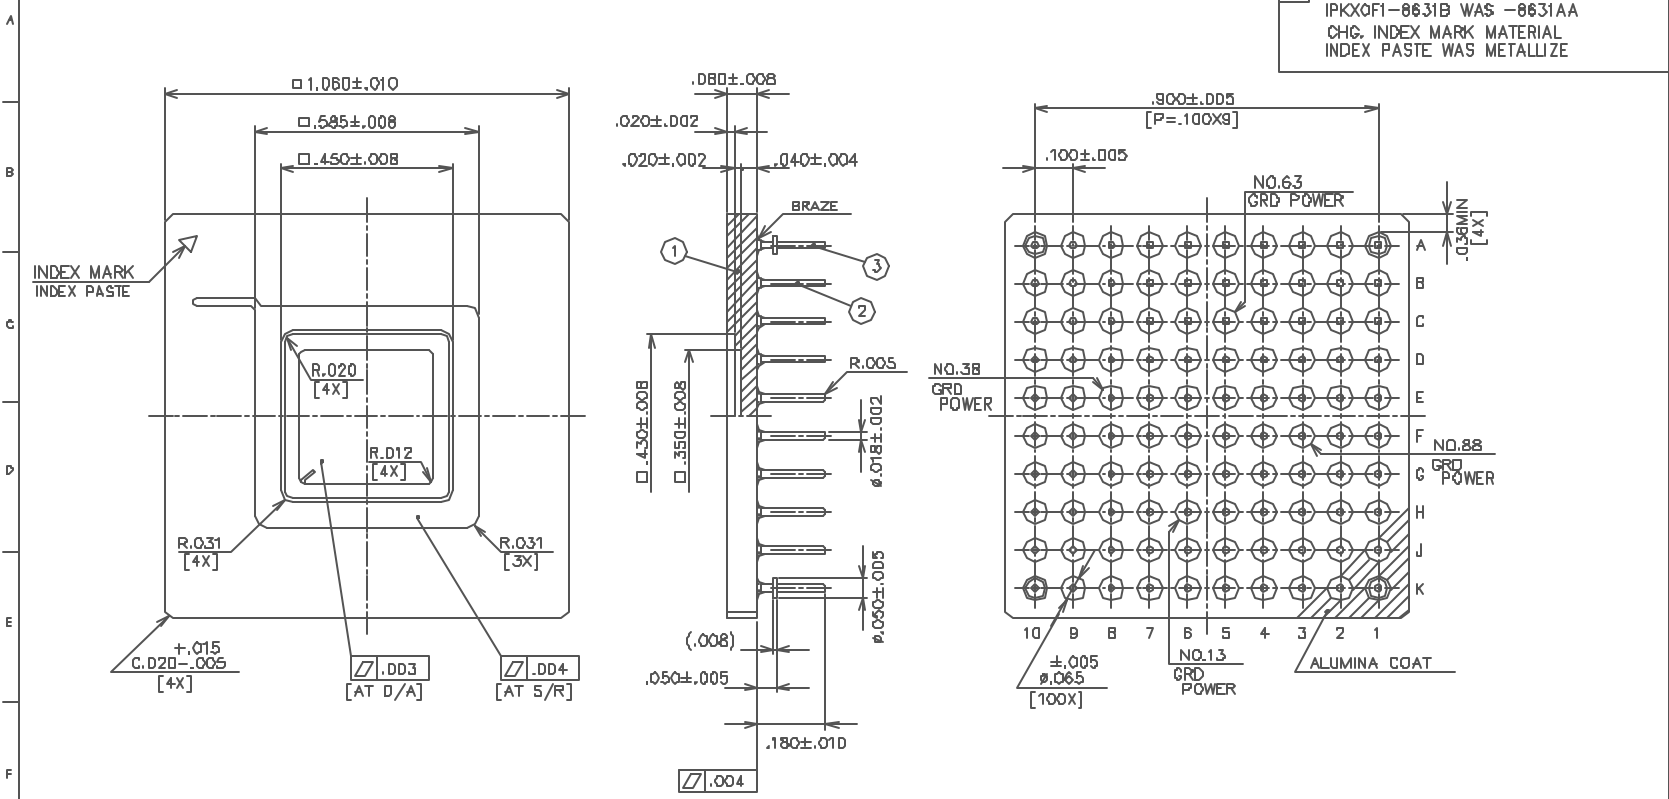

- NOTES: 1. GOLD PLATE 60~225? INCHES OVER 100~250? INCHES NICKEL.
 2. NO LEAD TO BE ELECTRICALLY CONNECTED TO THE DIE ATTACH PAD. SEAL RING ISOLATED.
 3. LEAD RESISTANCE:
 NO.13,3B,63,88 Pad -----75m? MAX.
 ALL OTHER ----- 1000m? MAX.

3	STAND OFF PIN	ALLOY42			
2	PIN	ALLOY42			
1	CERAMIC	BLACK ALUMINA			
UNLESS OTHERWISE SPECIFIED TOLERANCES: $\pm 1\%$ N.L.T. 3 DECIMALS MAX 403 3 DECIMALS 0000000			DRAWN: K.KAKITA CHECKED:	DATE: JUN-17-1993 REVISION:	DESCRIPTION: NTK TECHNICAL CERAMICS NTK SPARK PLUG COLLET
CUSTOMER: APPROVED			TITLE: 100 PIN GRID ARRAY		
DWG. NO.:			UNIT: INCH	BRW. NO.:	
			SCALE:	IPKXDF1-8631B	

MODIFIED DWG. NO. 2

PART NO. SHEET 1 OF 2



