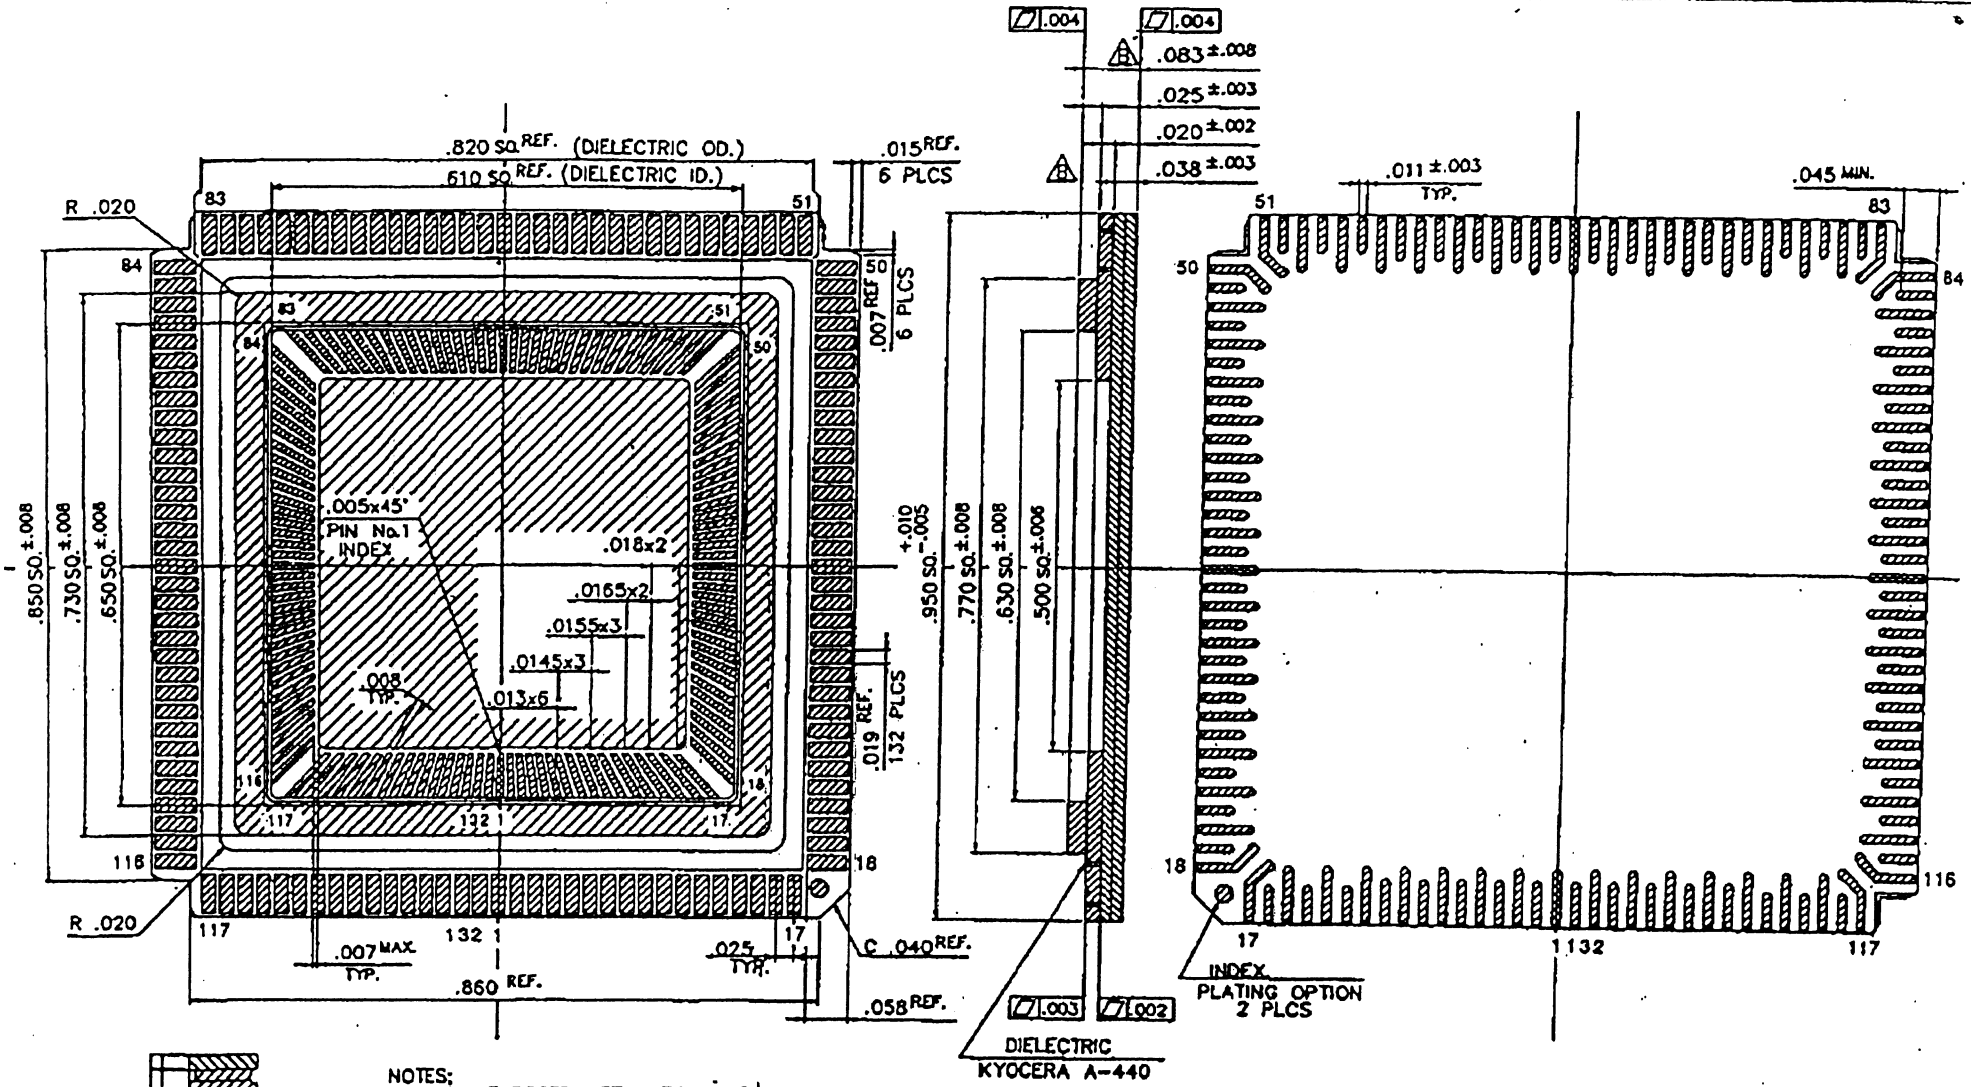



NOTES:

1. ALL EXPOSED METALLIZED AREA SHALL BE GOLD PLATED 80 MICRO INCHES MIN. THK. OVER NICKEL PLATED UNLESS OTHERWISE SPECIFIED PURCHASE ORDER.
2. FLATNESS METALLIZED PADS ONLY.
3. SEAL AREA AND DIE ATTACH AREA SHALL BE ISOLATED FROM ANY LEADS. (ZERO GROUND)
4. LEAD TO LEAD LEAKAGE SHALL NOT EXCEED 10 NANO AMPS AT 100V D.C.
5. LEAD RESISTANCE : 0.5 OHM MAX.
6. CAPACITANCE : 3.0PF MAX. 1000HZ.

30913207 Rev. * * Sheet 4 of 4

S=0
D=0

MODIFICATIONS				
A CHANGED; LAYER THICKNESS	5-26-'91	H.U	A.Y/S.M	Y.S
A ADDED; S/P PITCH	5-14-'91	H.U	A.Y/S.M	Y.S
CHANGE	DATE	DRAWN	CHECKED	APPROVED

NAME 132LCC (.500 SQ. CAV.)
SCALE 8/1
MATERIAL KYOCERA A-440
TOLERANCES ±.005
KYOCERA
KYOCERA CORPORATION KYOTO JAPAN
DRAWN H.U | CHECKED A.Y/S.M | APPROVED Y.S | DATE 05-09-'91
DRAWING NO
SHEET

LCC13204

PB-F88402 (VOO-132FZ) MOD

LCC13204 - PB-C91192-B