


NOTES:

- INTERPRET DRAWING PER BOB-STD-100.
- DIMENSIONS ARE TYPICAL FOR ALL QUADRANTS UNLESS OTHERWISE SPECIFIED.
- FINISH: GOLD PLATE 00.1 INCHES MIN OVER 00.1 INCHES MIN NICKEL.
- DIE ATTACH CAVITY AND SEAL RING WILL BE ELECTRICALLY ISOLATED.
- LEAD RESISTANCE: 400 MΩ MAX.
- NO METAL IN B/A CAVITY.
- ALL PARTS SHALL CONFORM TO SPEC. 003-0027 AND MIL-STD-883.
- PARTS SHALL COMPLY TO CEA CONFIGURATION ON MIL-STD-1835.

QUALITY CONTROL
MAR 16 1999
CONTROLLED COPY

REVISIONS					
ZONE	REV	ECN	DESCRIPTION	DATE	APPROVED
	NEW	612	NEW RELEASE	11/04/93	
	MA	700	CHG. NOTE #5	03/14/94	

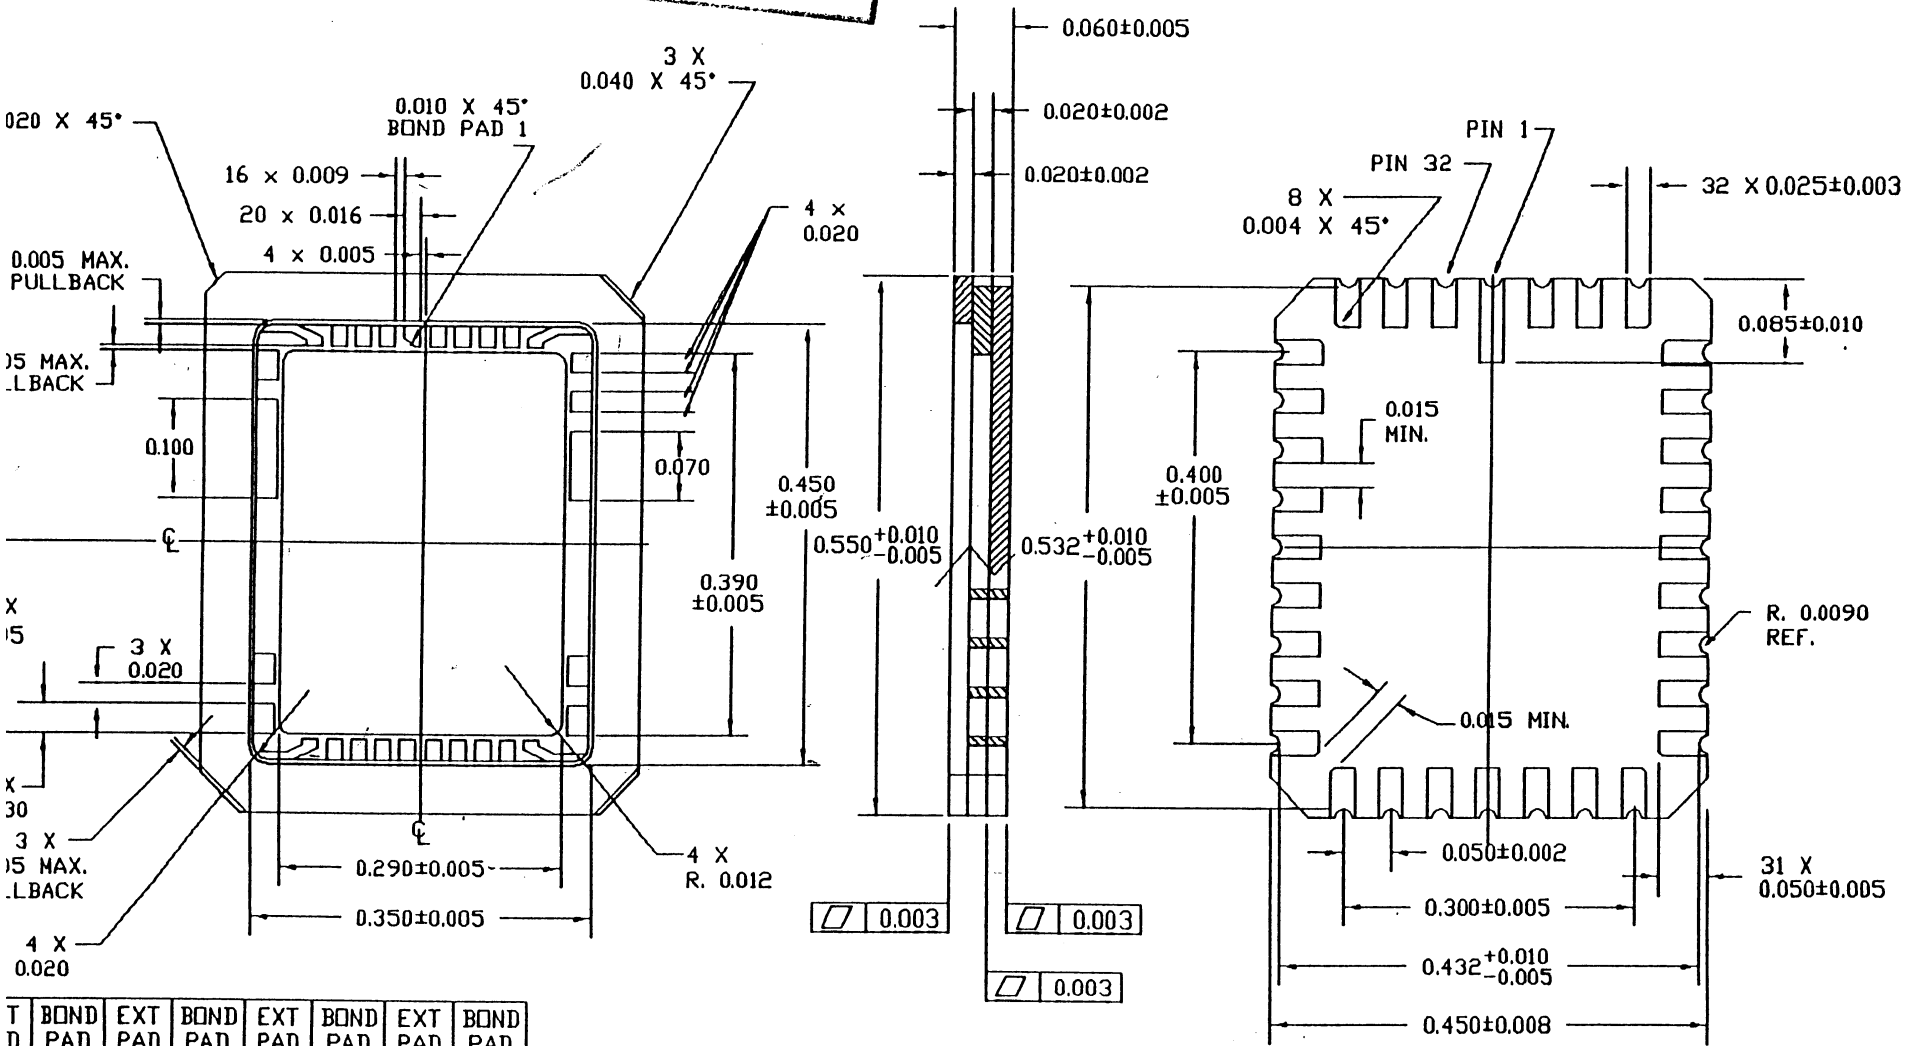

T	BOND PAD	EXT PAD	BOND PAD	EXT PAD	BOND PAD	EXT PAD	BOND PAD
D	N/C	9	8	17	N/C	25	22
	1	10	9	18	15	26	23
	2	11	10	19	16	27	24
	3	12	N/C	20	17	28	25
	4	13	11	21	18	29	26
	5	14	12	22	19	30	27
	6	15	13	23	20	31	28
	7	16	14	24	21	32	29

UNLESS OTHERWISE SPECIFIED		DESIGNED BY	DATE
ALL DIMENSIONS ARE IN INCHES		DRAWN	DATE
STANDARD TOLERANCES ON		DATE	03/14/99
DECIMALS	ANGLES	DATE	
0.001	± P 30'	DATE	
0.003		DATE	
0.010		DATE	
MATERIAL	APPROVED BY	DATE	
FINISH	SCALE		
SEE NOTE 3	1:1		

LCC03249

TITLE 32 LD LCC 290 X 390			
SIZE C	PART NO.	DWG NO.	REV
		51-20248	MA
SCALE 1:1	PAGE 1 OF 1		