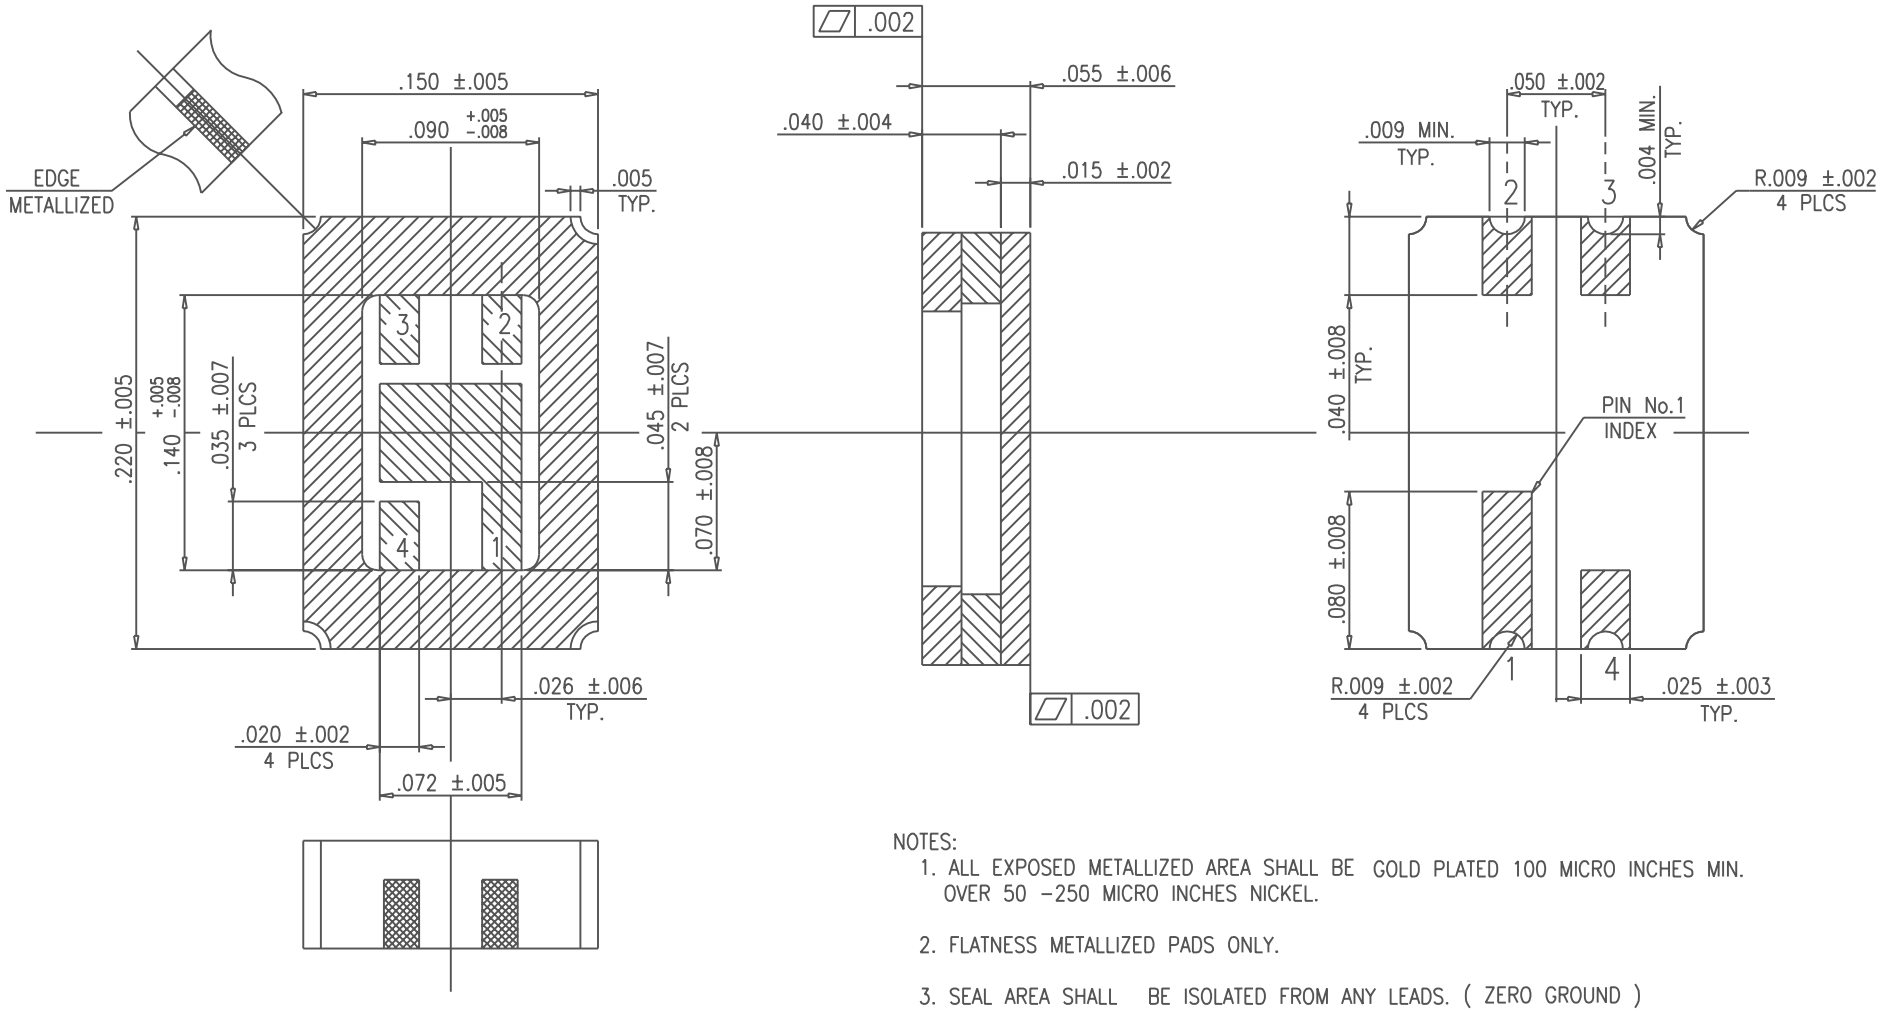

NOTES:

1. ALL EXPOSED METALLIZED AREA SHALL BE GOLD PLATED 100 MICRO INCHES MIN. OVER 50 -250 MICRO INCHES NICKEL.
2. FLATNESS METALLIZED PADS ONLY.
3. SEAL AREA SHALL BE ISOLATED FROM ANY LEADS. (ZERO GROUND)

MODIFICATIONS					
	CHANGE	DATE	DRAWN	CHECKED	APPROVED

NAME 4 LCC (MOO-4CZM) (.140x.090 CAV.)	TOLERANCES: UNLESS OTHERWISE SPECIFIED ± .005 THIRD ANGLE PROJECTION	DRAWN	CHECKED	APPROVED	DATE	S=0
			MOO-4CZM			D=C
SCALE 15/1	MATERIAL KYOCERA A-440	H.U	S.M / S.S	Y.S	9-27-'89	
KYOCERA	KYOCERA CORPORATION KYOTO JAPAN	DRAWING NO. PB-C89019			SHEET 1/1	