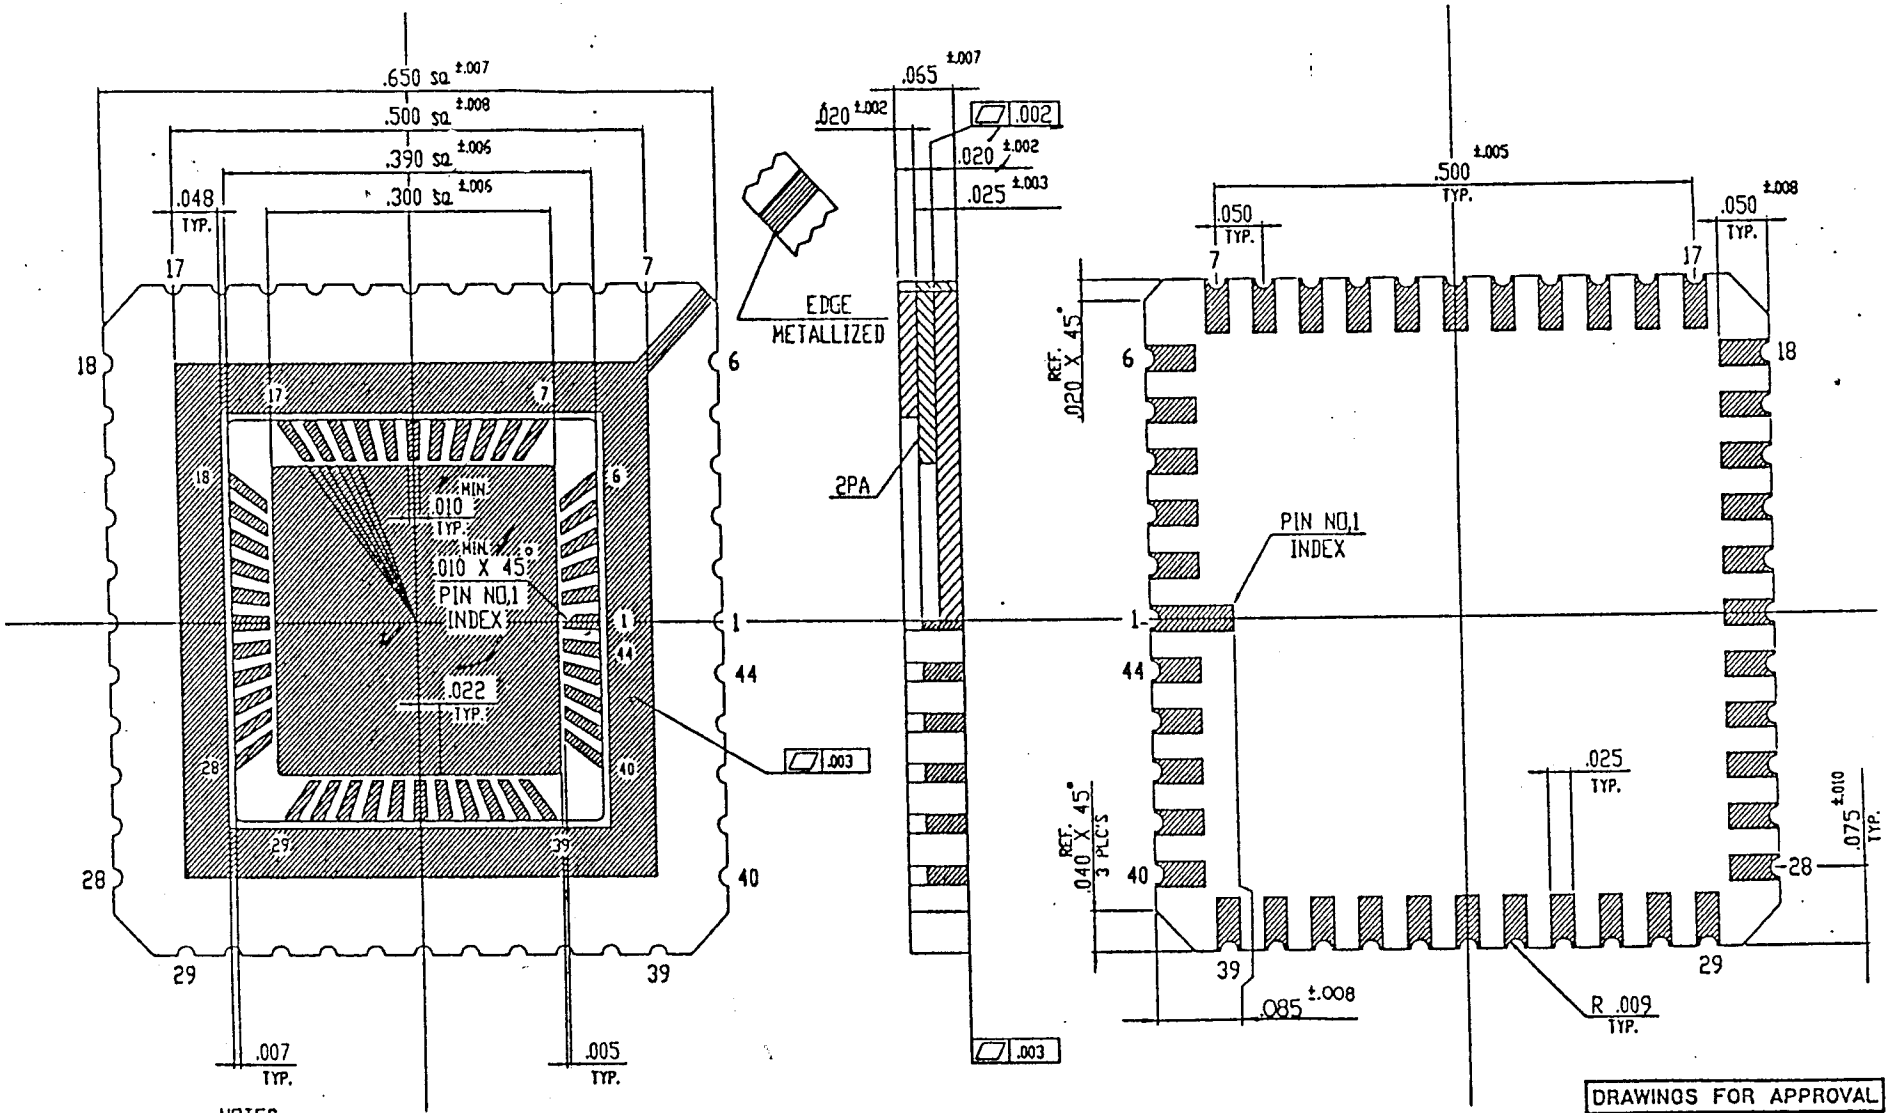

DRAWINGS FOR APPROVAL

NOTES

1. ALL EXPOSED METALLIZED AREA SHALL BE GOLD PLATED OVER NICKEL PLATED UNLESS OTHERWISE SPECIFIED PURCHASE ORDER.
2. FLATNESS METALLIZED PADS ONLY.
3. SEAL AREA AND DIE ATTACH AREA SHALL BE ISOLATED FROM ANY LEADS. (ZERO GROUND)

4. (A)

PART NO	NAME	Au THICKNESS	METALLIZATION	
			SEAL RING	DIE ATTACH
01		60 u' MIN.	WITH	WITH
02		60 u' MIN.	WITHOUT	WITHOUT
03		120u' MIN.	WITH	WITH

S=0
D=0

MODIFICATIONS						NAME 44LCC .300 SQ. CAV.	TOLERANCES: ±.005	DRAWN S, M	CHECKED T.I	APPROVED Y, S	DATE 8-28-'89
						SCALE 10/1	MATERIAL KYOCERA A-440				
(A) ADD: PART NO.03		8-28-89				KYOCERA	KYOCERA CORPORATION KYOTO JAPAN	DRAWING NO. PB-C87670-A			SHEET 1/2
CHANGE		DATE	DRAWN	CHECKED	APPROVED						

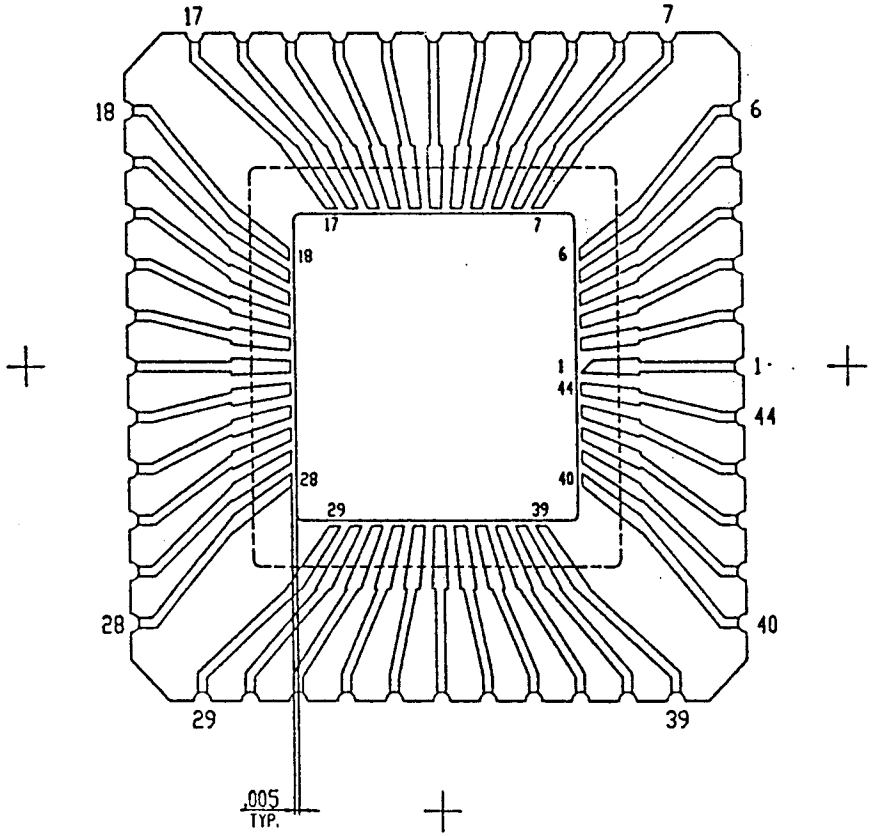

2PA

DRAWINGS FOR APPROVAL

MODIFICATIONS						NAME 44LCC .300 sq. CAV.		TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN	CHECKED	APPROVED	DATE
									S. M	T.I	T. S	8-28-'89
						SCALE 10/1	MATERIAL	±.005				
	CHANGE	DATE	DRAWN	CHECKED	APPROVED	KYOCERA	KYOCERA CORPORATION KYOTO JAPAN		DRAWING NO. PB-C87670-A			SHEET 2/2