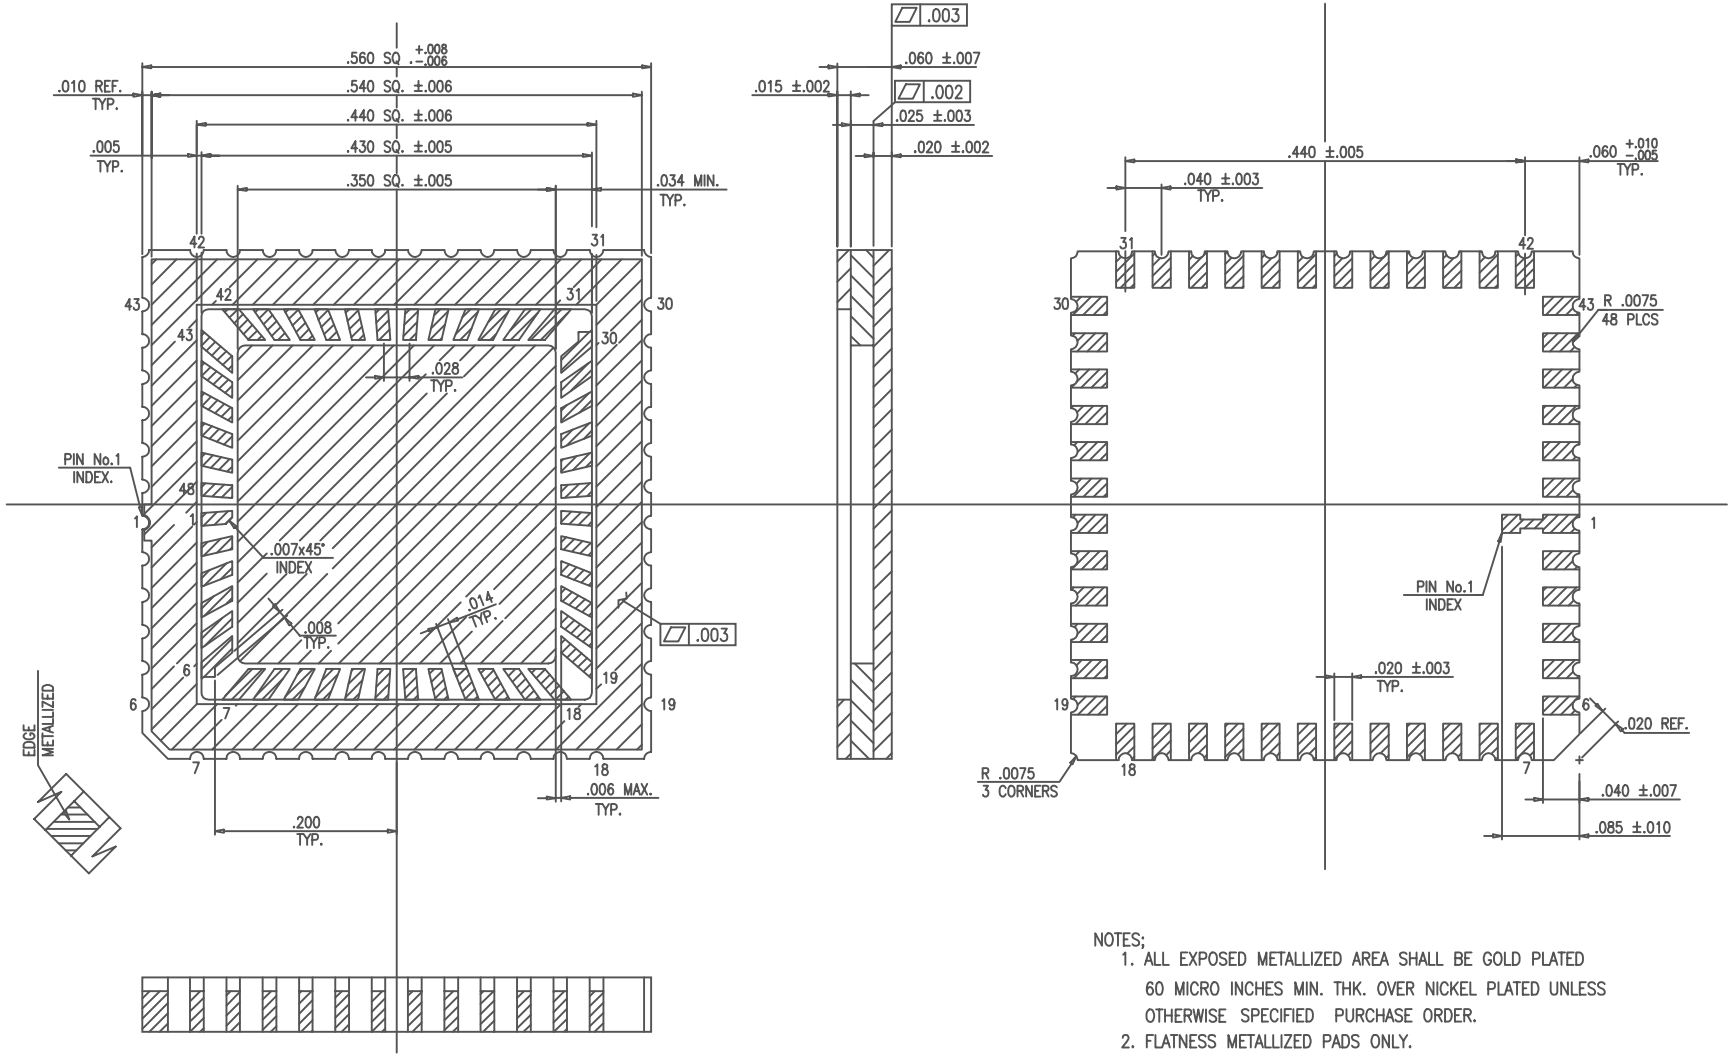

NOTES;

1. ALL EXPOSED METALLIZED AREA SHALL BE GOLD PLATED 60 MICRO INCHES MIN. THK. OVER NICKEL PLATED UNLESS OTHERWISE SPECIFIED PURCHASE ORDER.
2. FLATNESS METALLIZED PADS ONLY.
3. SEAL AREA AND DIE ATTACH AREA SHALL BE ISOLATED FROM ANY LEAD'S.(ZERO GROUND)

MODIFICATIONS					
	CHANGE	DATE	DRAWN	CHECKED	APPROVED

NAME 48 LCC	(CCY-48-01) (.350 SQ. CAV.)	TOLERANCES: UNLESS OTHERWISE SPECIFIED	DRAWN	CHECKED	APPROVED / DATE
SCALE 10/1	MATERIAL KYOCERA A-440	±.005 THIRD ANGLE PROJECTION	S.T	S.M / T.T	Y.S / 6-27-'89
KYOCERA	KYOCERA CORPORATION KYOTO JAPAN		DRAWING NO. PB-C89278		SHEET

S=0
D=0
CCY-48-01

PB-C86344 (CAO-48C) MOD.