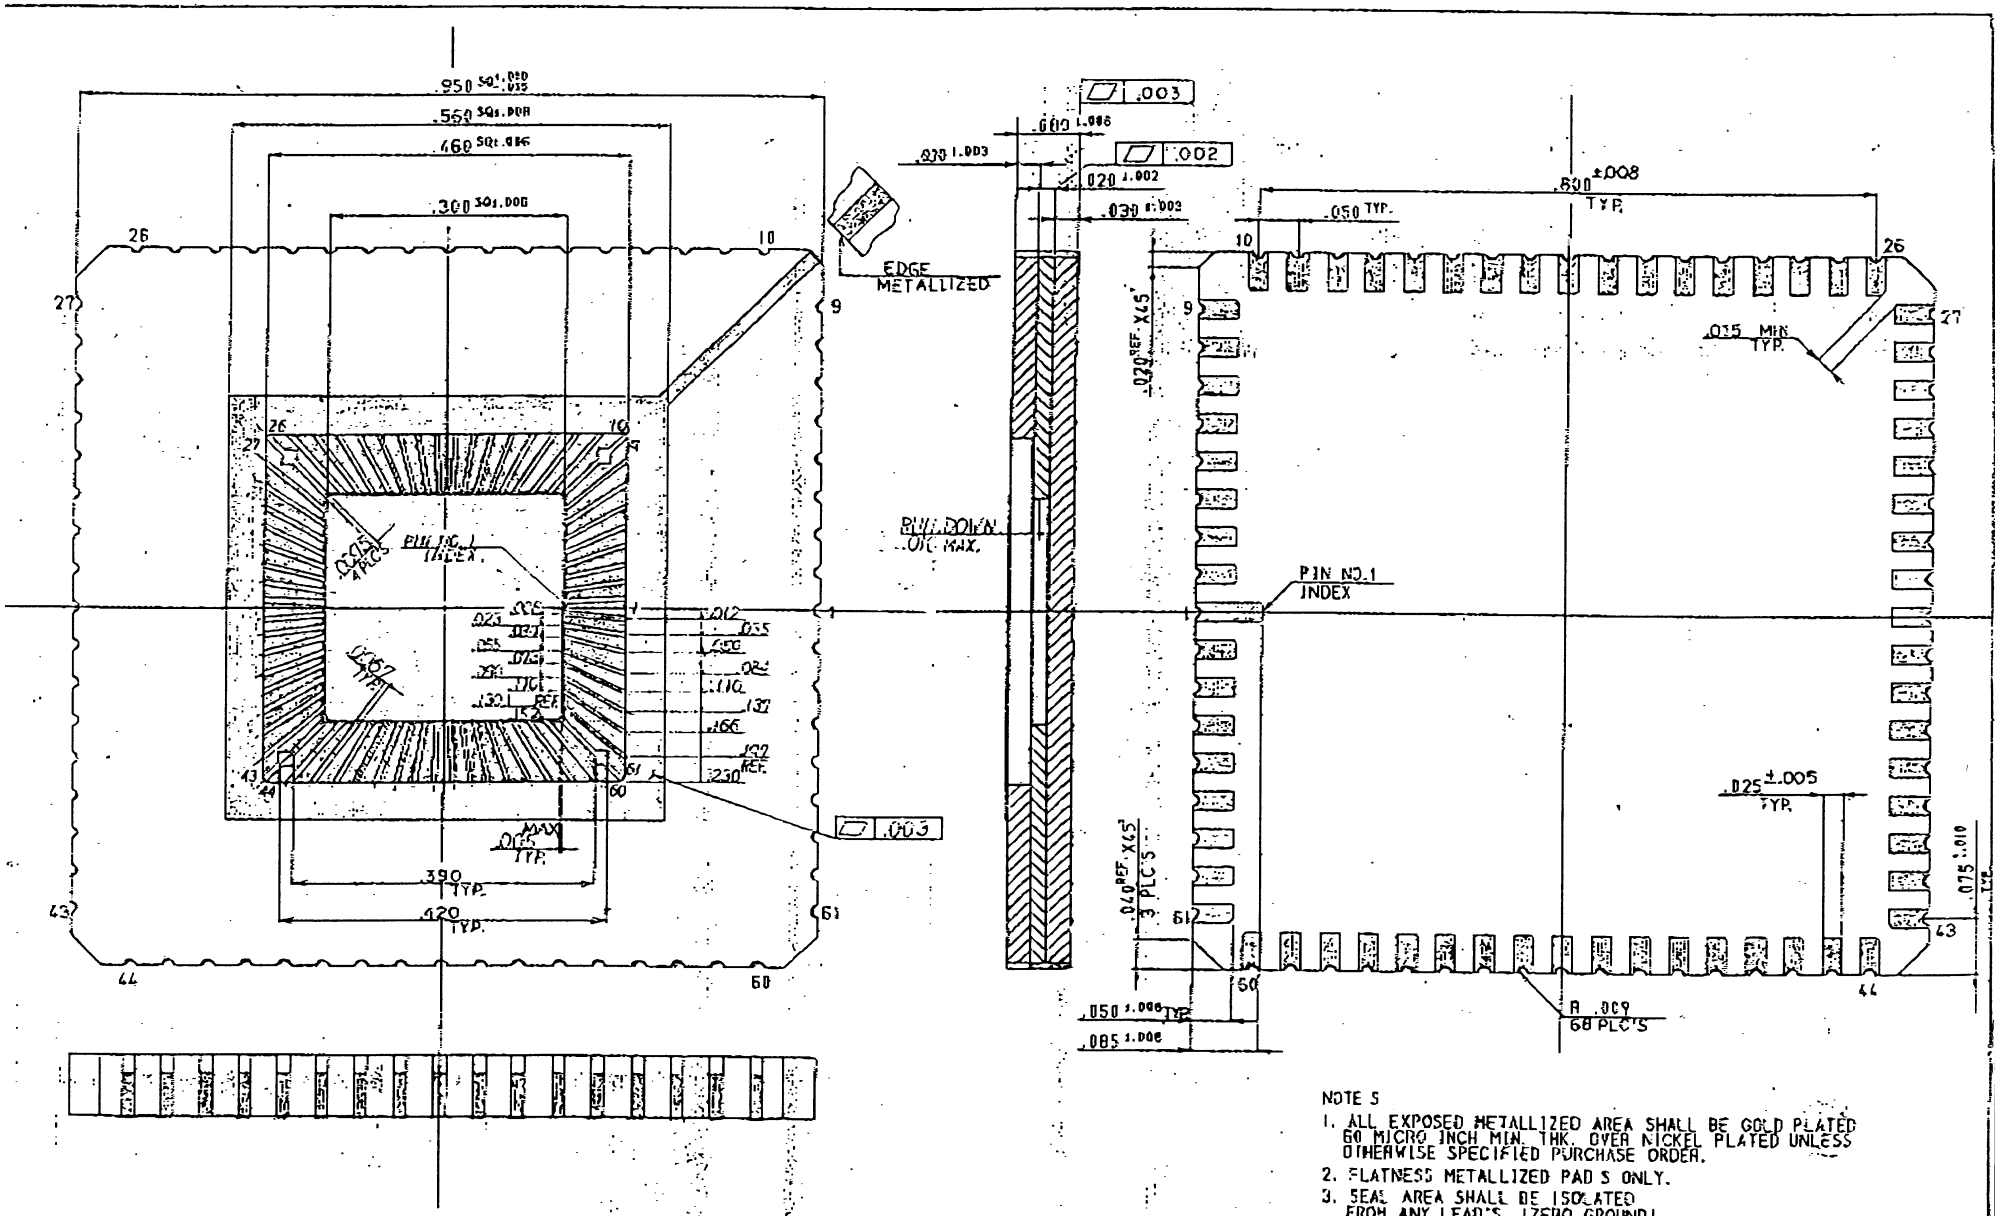

NOTE S

1. ALL EXPOSED METALLIZED AREA SHALL BE GOLD PLATED 60 MICRO INCH MIN. THK. OVER NICKEL PLATED UNLESS OTHERWISE SPECIFIED PURCHASE ORDER.
2. FLATNESS METALLIZED PAD S ONLY.
3. SEAL AREA SHALL BE ISOLATED FROM ANY LEAD'S. (ZERO GROUND)
4. PIN NO.1 SHALL BE ELECTRICALLY CONNECTED TO THE DIE ATTACH PAD : 0.4Ω MAX. OTHER LEAD : 0.5Ω MAX.

S=0
D=1

4406.3 | IGE-68CZ

MODIFICATIONS	CHANGE	DATE	DRAWN	CHECKED	APPROVED	

NAME: 68 LCC (IGE-68CZ) .300 SQ. CAV.
SCALE: 8/1
MATERIAL: KYOCERA A-440
TOLERANCES: ±.005
DRAWN / CHECKED / APPROVED / DATE: 9.29 '87
KYOCERA CORPORATION, KYOTO JAPAN
DWG. NO. PB-C87500

3C (PB-85235 MOD)