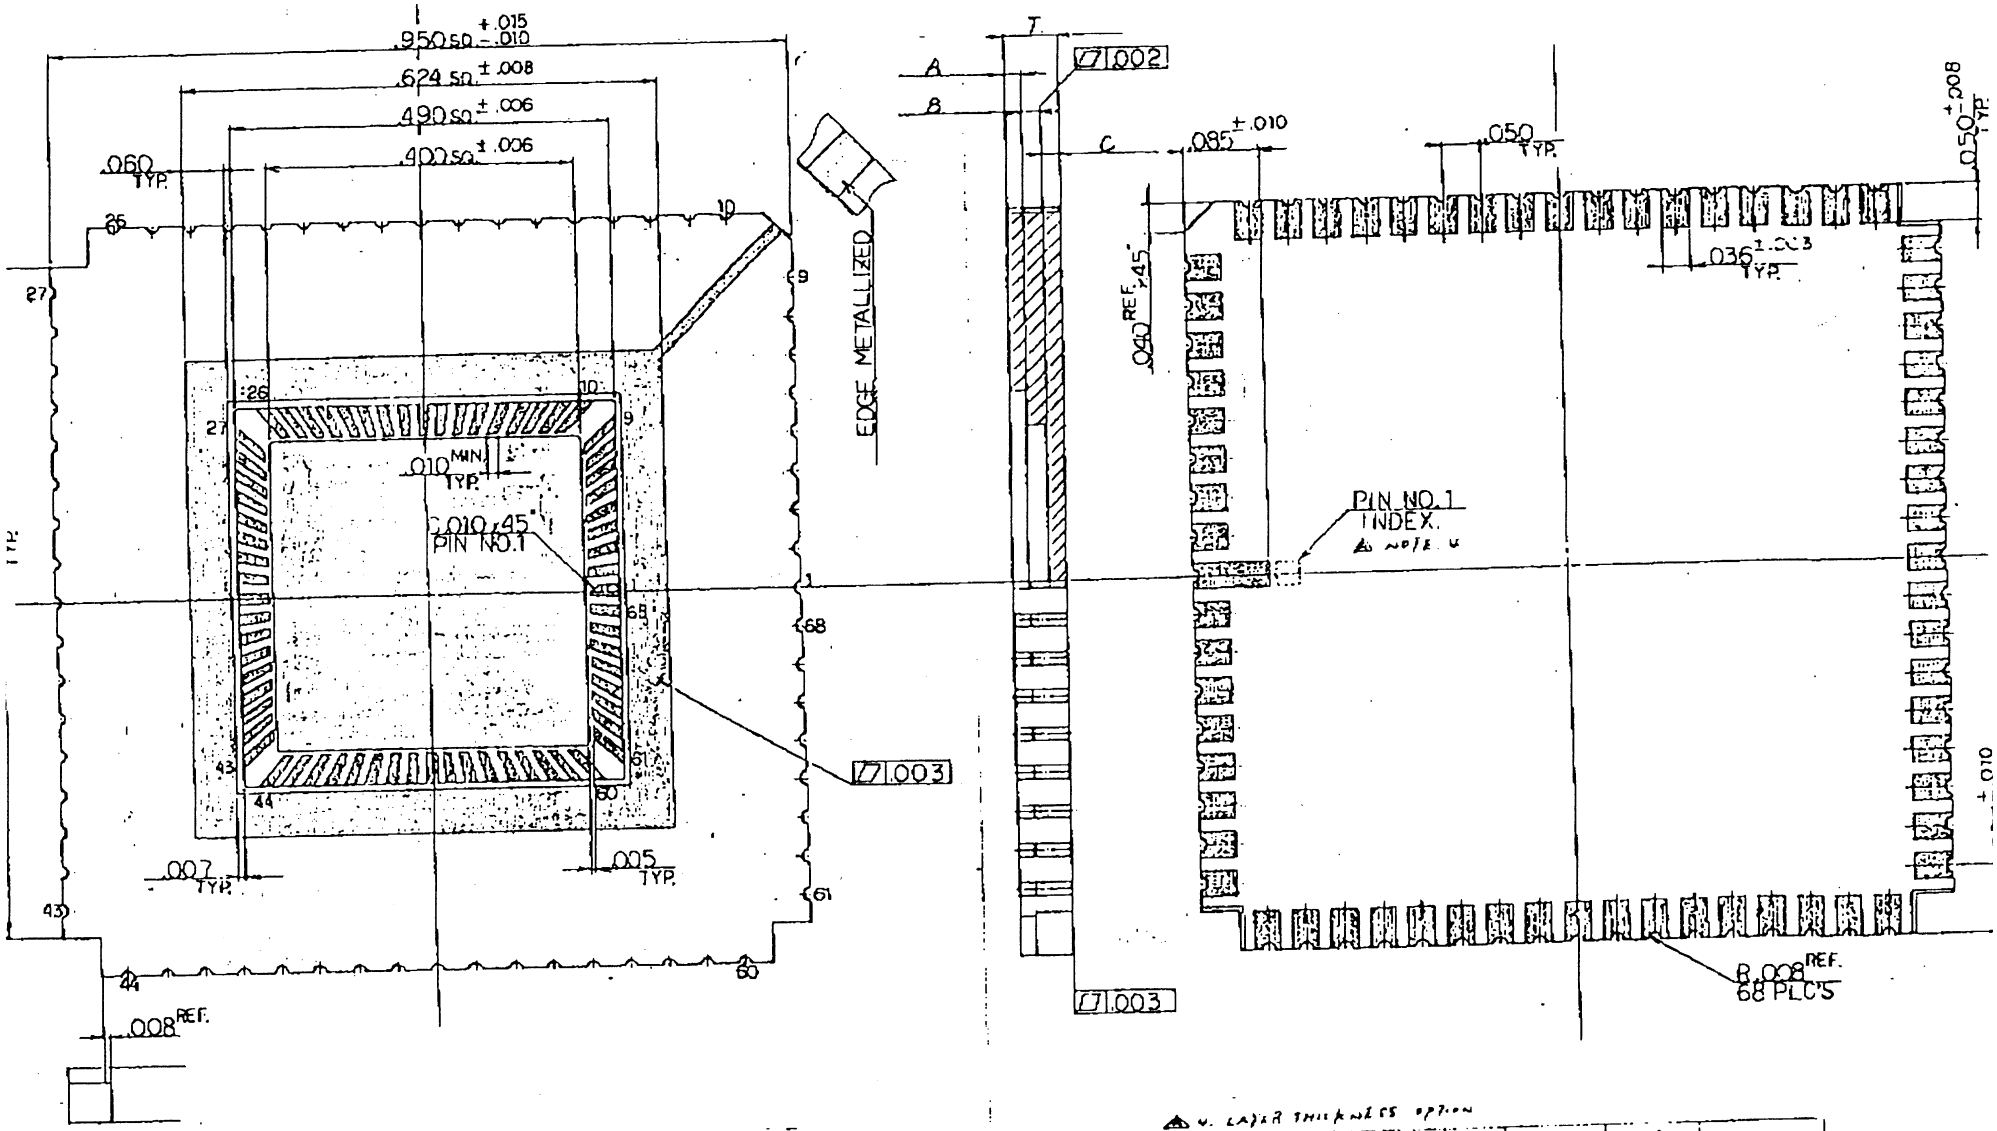

NOTES

1. ALL EXPOSED METALLIZED AREA SHALL BE GOLD PLATED 60 MICRO INCHES MIN. THK. OVER NICKEL PLATING UNLESS OTHERWISE SPECIFIED IN PURCHASE ORDER.
2. FLATNESS PERTAINS METALLIZED PADS ONLY.
3. SEAL AREA AND DIE ATTACH AREA SHALL BE ISOLATED FROM ANY LEADS. (ZERO GROUND)

4. LAYER THICKNESS OPTION

PART NO.	A	B	C	T	INDEX	
01	.020	.025	.025	.020 ±.002	○	PGO-68C
02	.020	.025	.020	.060 ±.007	□	PGA-68C

4	ADD : NOTE 4 CHANGE	DATE	DRAWN	CHECKED	APPROVED

NAME (PGO-68C) 68LCC
SCALE 8/1
MATERIAL KYOCERA A-440
TOLERANCES ±1% N.L.T. ±.005
KYOCERA CORPORATION KYOTO JAPAN
DRAWN
ISSUE NO. PB-C86058-

-68CAZ PB-13225-A MOD

P/O 710431

ATTN: LAURA B